


# Dragon X




**medlink**  
I M A G I N G

ALL PURPOSE portable X-ray unit

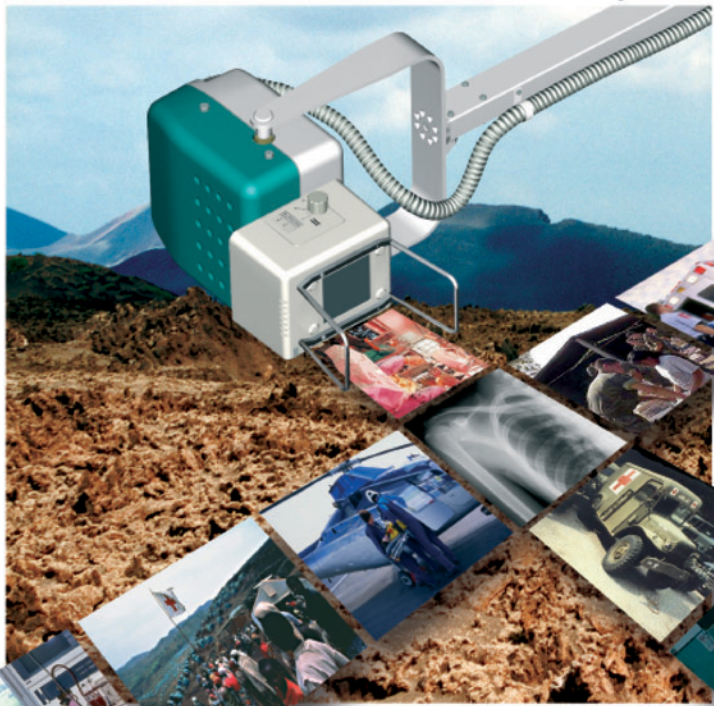

# Dragon X



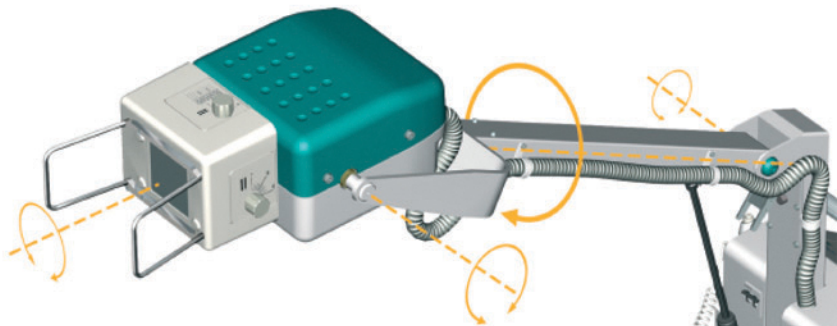


**New**

## All Purpose


## Portable X-ray Unit

**The Dragon X** is designed to carry the x-ray unit from door to door of the patient room in clinics and hospitals and therefore, can reduce patient positioning time and efforts.

**Standard applications are:** medical radiographic use in nursing homes, private homes, field clinics, correctional facilities, military field operations, intensive care units, emergency units, extremity orthopaedic or anywhere an x-ray machine must be brought to a patient.



- 4.0 kW high frequency generator (300 kHz).
- kVp Range of 40-115.
- Automatic line voltage compensation (90-264 VAC).
- Automatic output power adaptation to power line conditions (line impedance).
- Shorter exposure times than conventional X-ray units.
- Dual focal spot provides superior image quality.
- Easy to transport — user-friendly.

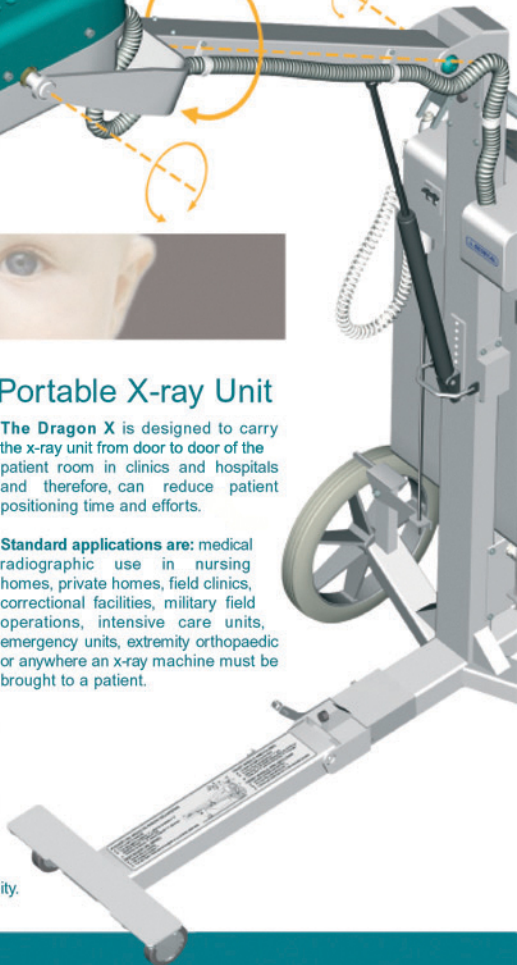

# Dragon X

## SPECIFICATIONS

## High Frequency X-ray Generator

### MODEL

SPS-HF 4.0

### CONSTANT POTENTIAL KW RATINGS

4.0

### HIGH FREQUENCY RIPPLE

300 kHz

kVp RANGE in 1kVp steps  
Accuracy

40 to 115  
+/- 5%

mAs RANGE  
Number of Stations  
Accuracy

0.1 - 200 mAs  
34 (in 25% steps)  
+/- 5%

EXPOSURE TIME RANGE  
Number of Stations

0.001 - 10 seconds  
41 (in 25% steps)

### mA STATIONS

5, 6, 4, 8, 10, 12.5, 16, 20, 25, 32, 40,  
50, 64, 80, 100

### X-RAY TUBE

Stationary Anode  
TWO Focal Spots:  
Anode Heat Storage Capacity  
Target Angle

Yes  
0.6 mm - 1.5 mm  
40,000 HU  
14°

### POWER CORD

6 meters

### EXPOSURE CORD

3 meters

### LINE VOLTAGE AND PHASES

Single-Phase Line Automatic Regulation  
from 100 to 240 VAC (+/-10%) - (50/60Hz)

**AUTOMATIC OUTPUT POWER ADAPTION TO POWER LINE CONDITIONS**  
(Line Voltage & Impedance)

**AUTOMATIC TUBE WARM UP, INCREASING TUBE LIFE TIME**



### LINE POWER REQUIREMENTS

Line Current at 110 VAC  
Line Current at 230 VAC


32 A  
16 A

### WEIGHT

60 kg



Specifications subject to change without prior notice



New York Corporate Office  
& Distribution Center  
200 Clearbrook Road  
Elmsford, NY 10523

Toll Free: 800-456-7800  
914-347-0102  
Fax: 888-437-9729

California Distribution Center  
517 Maple Avenue  
Carpinteria, CA 93013



0120