
# Upright Raymaster

### **Upright Imaging System**

This economical system combines our VS100 (3546) wall stand with our 3307B M tube stand to meet specialized radiographic needs. The VS100's extensive vertical travel of 58.38in (148.28cm) allows for a full range of upright radiographic studies from skull to lower extremities.



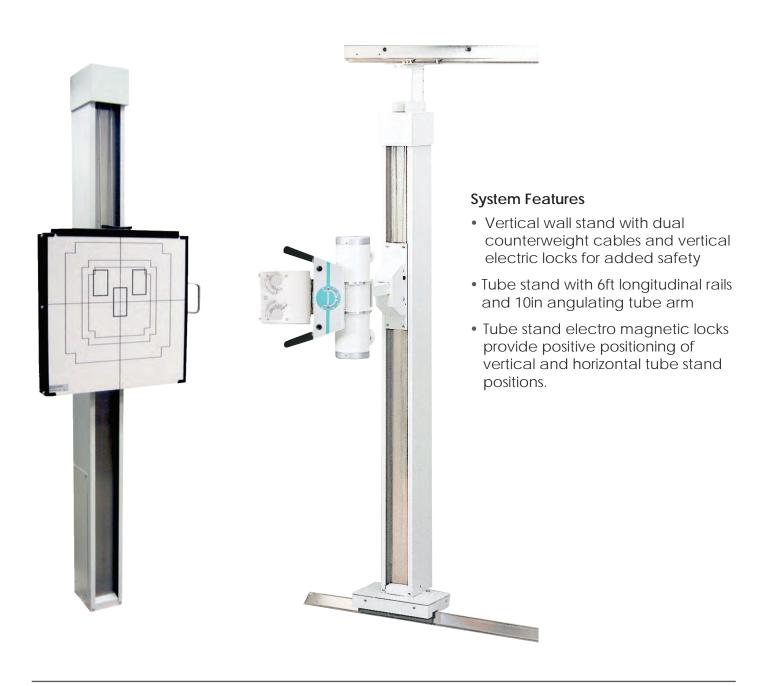

## **Upright Raymaster**

#### Upright Imaging System



Wall stand height: 86.75in (220.4cm) Receptor height: 23.38in (59.4cm) Vertical travel range: 58.38in (148.28cm)

Wall stand width

(with receptor): 23.25in (59cm)

Wall stand depth

(with receptor): 13in (33cm)

Maximum focal

spot height: 72.38in (183.84cm)

Minimum focal

spot height: 14in (35.6cm)

Front panel aluminum

0.4mm equivalency:

258lb (117kg) Weight:

Power requirements: 24VDC

#### 3307 Tube Stand - Technical Specifications

14.5in (37cm) Min. vertical travel:

Rails: 6ft longitudinal floor and

ceiling rail set allows for 40in (100cm) and 72in (180cm) film distances

Maximum ceiling

height: 114in (274cm)

Minimum ceiling

height: 94in (233cm)

Tube rotation: 180° tube rotation about


the horizontal axis


#### **System Options**

- · Choice of high frequency or single phase generators to meet specific needs
- 10:1 or 12:1 ratio grids for analog or digital imaging
- 17in x 17in (43cm x 43cm) grid cabinet or bucky
- Ion chamber (AEC)

#### Certifications

ETL listed

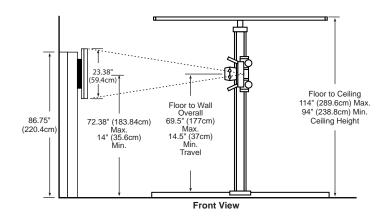

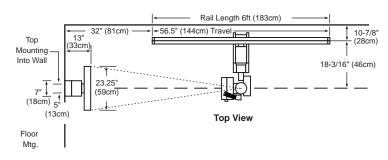

#### **DEL MEDICAL**

Toll Free: (800) 800-6006 (847) 288-7011 Email: info@delmedical.com

www.delmedical.com

Universal Universal branded products are manufactured and

Del Medical is an ISO 13485 & ISO 9001 Certified facility. Specifications are subject to change without notice.

distributed by UMG/Del Medical.

Toll Free: (800) 261-9808 Fax: (914) 835-6111 Email: info@umgxray.com www.umgxray.com

28 Calvert Street, Harrison, NY 10528